
7872W - Adapter Multilayer - Steel (M Profile)

Product Data Sheet 2026/09/22

The Greenskin Metallic Press fittings for multilayer pipe.

- A range of metal fittings from 14 to 75 mm.
- Greenskin press fittings are compatible with TH, H and U profiles.
- Immediate verification of crimping with the Visu-Control ring.
- Low pressure loss across the fittings.

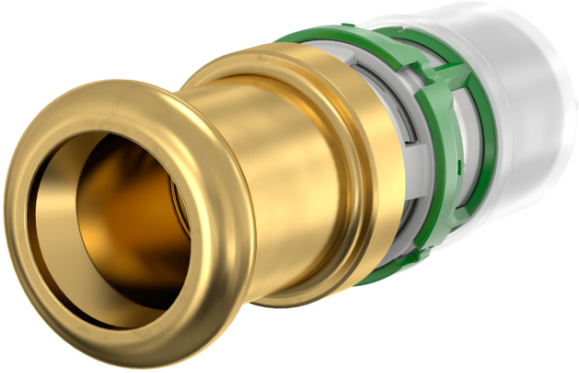

Advantages

Performance

- Press connections can be done in seven seconds and this type of connection avoids the risks associated with welding.
- Greenskin press fittings are compatible with TH, H and U profiles, and therefore with different tool brands.
- Improved hydraulics with a reduction of pressure losses of 17% on average compared to former products.


Safety

- Removable Visu-Control® ring, allowing visual and tactile control of a crimp.
- The "not crimped, not sealed" technology: if not crimped, the fitting allows water to pass during the pressure test.
- Protective cap to prevent impurities from penetrating.

Technical Specifications

Greenskin system is designed for the following applications:

- Sanitary water: +5 °C to +95 °C (operating temperature) and 10 bar (maximum operating pressure).
- Heating and cooling: -10 °C to +95 °C (operating temperature) and 10 bar (maximum operating pressure).
- Rainwater: -10 °C to +95 °C (operating temperature) and 10 bar (maximum operating pressure).



© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.

Type	Dimensions	Order Code
Adapter Multilayer (TH Profile) / Steel (M Profile) 16x2 - 15	16x2 - 15	7872W1615
Adapter Multilayer (TH Profile) / Steel (M Profile) 20x2 - 15	20x2 - 15	7872W2015
Adapter Multilayer (TH Profile) / Steel (M Profile) 20x2 - 22	20x2 - 22	7872W2022
Adapter Multilayer (TH Profile) / Steel (M Profile) 26x2 - 22	26x2 - 22	7872W2622

Dimensions 7872W - Adapter Multilayer - Steel (M Profile)

Type	Dimensions							
	d1 [mm]	d2 [mm]	D1 [mm]	D2 [mm]	z1 [mm]	z2 [mm]	l1 [mm]	l2 [mm]
Adapter Multilayer (TH Profile) / Steel (M Profile) 16x2 - 15	16	15	23	23	9	5	33	25
Adapter Multilayer (TH Profile) / Steel (M Profile) 20x2 - 15	20	15	27	23	7	5	31	25
Adapter Multilayer (TH Profile) / Steel (M Profile) 20x2 - 22	20	22	27	32	10	7	34	28
Adapter Multilayer (TH Profile) / Steel (M Profile) 26x2 - 22	26	22	33	32	8	7	33	28



© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.

Find more information online:

Installation and operating instructions
ACS certificate
DVGW certificate (DW-8501CT0387)
DVGW certificate (CW-8501CT0388)
NF certificate
WRAS certificate
PZH certificate
PZH certificate MultiSkin2
PZH certificate MultiSkin4
MultiSkin ÉMI certificate HUN
Certificate MultiSkin RUS
MultiSkin Drinking water certificate HUN
KIWA K90957-08 MultiSkin 4 Piping System
KOMO K90961-08 certificate MultiSkin 4 Piping System
KIWA K110283-01 MultiSkin 2 Piping System
KOMO K110284-02 certificate MultiSkin 2 Piping System
KOMO certificate BioPEX system
KOMO certificate BioPert system
7872W DWG
7872W STEP
Leaflet
Greenskin Multilayer press-fit system

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 20 210 34 97
E nl.info@aalberts-hfc.com
I comap.aalberts-hfc.com/nl

© 2026 Aalberts hfc B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.